


### GFRG/GFRC ACCESS PANEL FOR CEILINGS

26" x 46"


## POP-OUT SQUARE CORNER

#### **INSTALLATION SPECIFICATION**

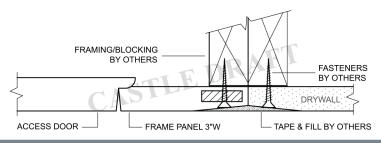

| DIMENSION AND APPEARANCE |                             |                    |  |  |
|--------------------------|-----------------------------|--------------------|--|--|
| STOCK#                   | ACCESS DOOR<br>OPENING SIZE | ROUGH OPENING SIZE |  |  |
| SQ-580008                | 8" x 8"                     | 14" x 14"          |  |  |
| SQ-580009                | 9" x 9"                     | 15" x 15"          |  |  |
| SQ-580012                | 12" x 12"                   | 18" x 18"          |  |  |
| SQ-580016                | 16" x 16"                   | 22" x 22"          |  |  |
| SQ-580018                | 18" x 18"                   | 24" x 24"          |  |  |
| SQ-580020                | 20" x 20"                   | 26" x 26"          |  |  |
| SQ-580024                | 24" x 24"                   | 30" x 30"          |  |  |
| SQ-580030                | 30" x 30"                   | 36" x 36"          |  |  |
| SQ-580036                | 36" x 36"                   | 42" x 42"          |  |  |
| SQ-580042                | 42" x 42"                   | 48" x 48"          |  |  |
| SQ-580048                | 48" x 48"                   | 54" x 54"          |  |  |
| SQ-581236                | 12" x 36"                   | 18" x 42"          |  |  |
| SQ-581836                | 18" x 36"                   | 24" x 42"          |  |  |

20" x 40"



| TECHNICAL DATA                      |                 |  |  |  |
|-------------------------------------|-----------------|--|--|--|
| Shell Thickness                     | 1/8" to 3/16"   |  |  |  |
| Fastener Test Pull Out (wood stud)  | 525 lb avg.     |  |  |  |
| Fastener Test Pull Out (metal stud) | 215 lb avg.     |  |  |  |
| Fastener Push Through Test          | 350 lb avg.     |  |  |  |
| Fuel Contribution (ASTM E84-80)     | 0               |  |  |  |
| Flame Spread (ASTM E84-80)          | 0               |  |  |  |
| Smoke Index (ASTM E84-80)           | 0               |  |  |  |
| Combustion (ASTM E84-80)            | Non-combustible |  |  |  |
| Class A non-rated                   | _               |  |  |  |
| CSI Code                            | CSI #08310      |  |  |  |

#### **PRODUCT FEATURES**

SO-582040

#### **CREATING SEAMLESS SOLUTIONS**

Seamless™ Access Panels by Castle are manufactures direct, manufactured from GFRG/GFRC & 70% post-consumer recycled glass, for a unique GREEN design-matrix designed to blend seamlessly into your walls and ceilings. They consist of a surround frame and either a drop-in door or hinged door. Available in Sixty standard residential or commercial sizes, Castle panels are perfect for jobs where access is required at regular intervals. Lightweight and easily textured, the panels can be used in both new and retrofit construction across unlimited applications. Their smart design to helps contractors work smarter, faster and better, the Seamless™ panels feature a tapered edge for tape joints and won't shrink, crack or sag. Seamless™ Access Panels provide an aesthetically pleasing solution for a more attractive interior.

#### PRODUCT FEATURES

- Tapered edge for tape joint
   Easily textured
- Lightweight
   S
- Single trade installation
- No shrinking, cracking, sagging or rusting
- Blends seamlessly into surrounding drywall
- Concealed hinge
- Reduce labor costs

#### LEED RATING SYSTEM

LEED ready





# PROJECT NAME: PROJECT NAME: QTY W H OPTIONS ARCHITECT: DEALER: CONTRACTOR: LOCATION: SPECIAL INSTRUCTIONS: TAGGING INSTRUCTIONS: SUBMITTAL APPROVAL: (signature or stamp)

#### CASTLE ACCESS PANELS & FORMS INC.

135 Wendell Ave, North York, ON, M9N 3K9 Canada

Phone: (905) 738-8089

www.castleacesspanels.com order@castleaccesspanels.com